

Technical Manual



SAFETY
FOR
FUTURE



www.emme-italia.com

Via del Molino, 40 – 52010 Corsalone (AR) – Italy – info@emme-italia.com – Tel. +39.0575.511320
P.IVA/ C.F. 11208251006 – R.E.A. AR-159122

GW150A 19158-701 : Wheeled Fire Extinguisher, 150 L Foam



Note: image is for illustrative purpose only, the product purchased can have some differences



FLUORINE FREE

- **CYLINDER**
Stainless steel AISI 304,
powder painting, Red Ral 3000.
- **EXTINGUISHING AGENT**
Fluorine free foam, water based.
- **PROPELLANT**
Auxiliary pressure.
Fire extinguisher pressurized at
moment of use with Nitrogen (N₂).
- **CAP**
2"-F , brass.
- **USE**
A B fire rating
(solid materials, flammable liquids).
- **BRACKET**
Chassis on wheels, welded at the
cylinder, red painting Ral 3000.
- **DISPENSING PISTOL**
Body in plastic material.
The rotating connection allow an easy
unroll of hose.

REPRODUCTION IS PROHIBITED

150 L foam wheeled fire extinguisher, pressurized at moment of use, temperature range from +5°C to +60°C, manufactured in accordance to **UNI EN 1866-1**, approved Marine Equipment Directive **MED 2014/90/UE**, certified according to the directive for pressure equipment **PED 2014/68/EU**. Quality Product certification guaranteed by Bureau Veritas Italia. Suitable for use on fire involving electrical voltages up to 1'000 V, at a distance of 1 meter.

ESTINTORE APPROVATO/CERTIFICATO:



FIRE
RATING :



File name	Type of document	Fire Extinguisher Model	Date	Rel.	Check	Rev.	Pag.
19158-701_GW150A_ Technical Manual	Technical Manual	GW150A_19158-701	30/05/2025	S.R.		3	1/3

GW150A 19158-701 : Wheeled Fire Extinguisher, 150 L Foam

- **INSTALLATION** The installation must be carried out in accordance with the provisions in force in the country where the device is used. The commissioning and maintenance activities for maintaining efficiency must be carried out in accordance with the document **CSA_1_ENG** by qualified
 - **USE**
 - **MAINTENANCE** technical personnel and in compliance with the regulations in force in the country of use.
- Any tampering or intervention carried out by unqualified personnel will void the product warranty.
It is recommended to place the device in a dry place protected from atmospheric agents.


TECHNICAL SPECIFICATIONS

FIRE RATING	A IV B
EXTINGUISHING AGENT	100% Green Wave Premix
PROPELLANT	Nitrogen (N ₂), 180 Bar
TEMPERATURE RANGE	+5°C / +60°C
NOMINAL CHARGE	150 Liters
FULL WEIGHT	~ 212 Kg
DIMENSIONS	Height 1350 +/- 10 mm ; Width 635 +/- 10 mm Depth 750 +/- 15 mm
DISCHARGE TIME	~ 884 seconds
CYLINDER PRESSURE TEST	PT 30 bar
CYLINDER VOLUME	170 L
SAFETY DEVICE	Set between 21 and 26 bar
CYLINDER MATERIAL	Stainless steel AISI 304
TREATMENT	Outside: Sandblast and powder painting Ral 3000

PACKAGING

(Note: the packaging quantities and measurements are indicative and can be subject at change)

STANDARD
Maximum nr. 1 pieces for pallet
Pallet dimensions 100x120x150(h) cm

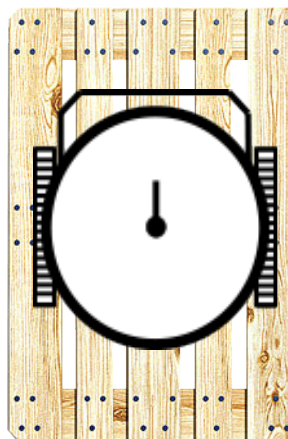


TRANSPORT DISPOSAL

Land transport : Exemption for the purposes of ADR disposal 594
Ship Transport : IMDG Code – UN 1044 class 2.2 Fire Extinguishers

File name	Type of document	Fire Extinguisher Model	Date	Rele.	Check	Rev.	Pag.
19158-701_GW150A_ Technical Manual	Technical Manual	GW150A_19158-701	30/05/2025	S.R.		3	2/3

GW150A 19158-701 : Wheeled Fire Extinguisher, 150 L Foam

COMPONENTS AND SPARE PARTS LIST

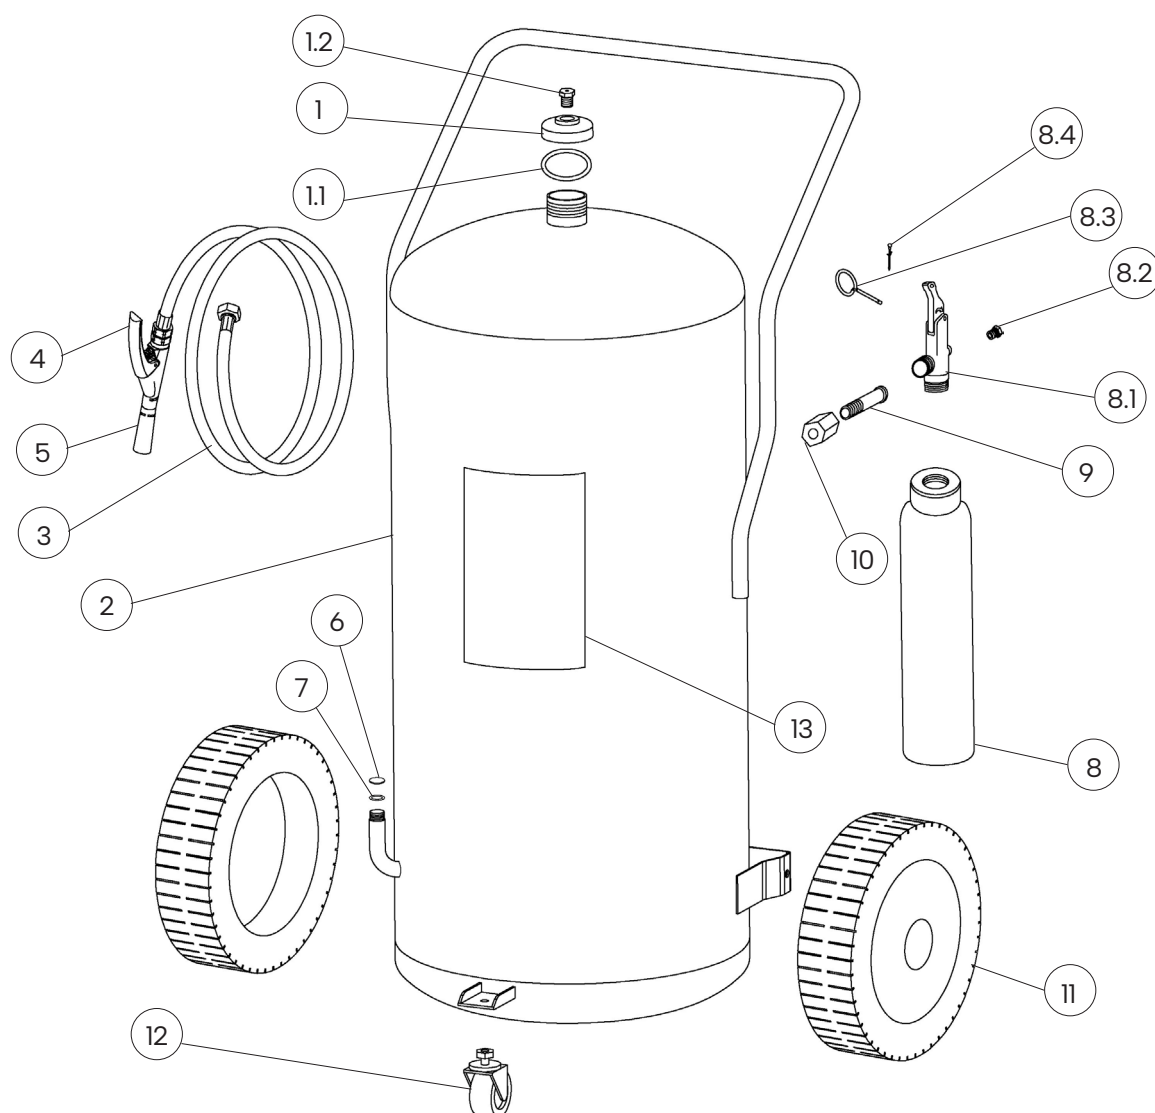

NUM.	DESCRIPTION	CODE
1	2" brass cap	18463
1.1	O-ring cap	n.a.
1.2	Safety device	n.a.
2	Cylinder	18328
3	Hose	18421-5
4	Dispensing pistol	2181-4
5	Dispensing nozzle	1645-5
6	Membrane	0262-4
7	Copper washer	2148-11
8	Complete pressurization cylinder, with Nitrogen	18516-4

NUM.	DESCRIPTION	CODE
8.1	Tilting valve W28.8 x 1/14" for nitrogen cylinder	0223L
8.2	Safety device	n.a.
8.3	Safety pin	0282-1
8.4	Safety pin seal	0285
9	Fitting for cylinder with nitrogen cylinder	18489
10	Fitting for nitrogen cylinder with cylinder	18495
11	Wheel (diam. 400mm)	0125
	Thick washer	2148-10
	Cotter pin stop wheel	9443
12	Front wheel	1686
13	Label	18380-71

The spare part at number 1 (valve) includes already others components 1.1 and 1.2

The spare part at number 8 (cylinder) includes already others components indicated from 8.1 to 8.4

"n.a." mean that the component is not available as single spare part.

File name	Type of document	Fire Extinguisher Model	Date	Rele.	Check	Rev.	Pag.
19158-701_GW150A_ Technical Manual	Technical Manual	GW150A_19158-701	30/05/2025	S.R.		3	3/3